

4

3





2

1

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVAL
A	ORIGINAL		
B	New Mounting Kit (Note B)	08.02.2008	OBL

Note D:  
Bending of the Grounding Foil.  
Diameter of tool approx.  $\phi$  4mm.

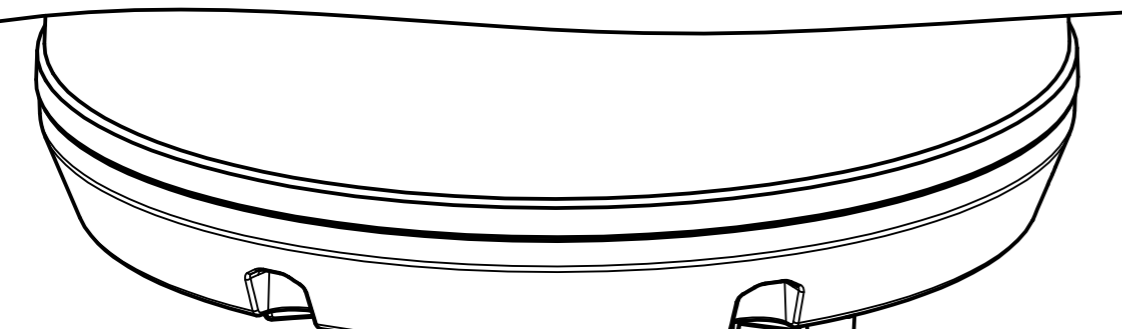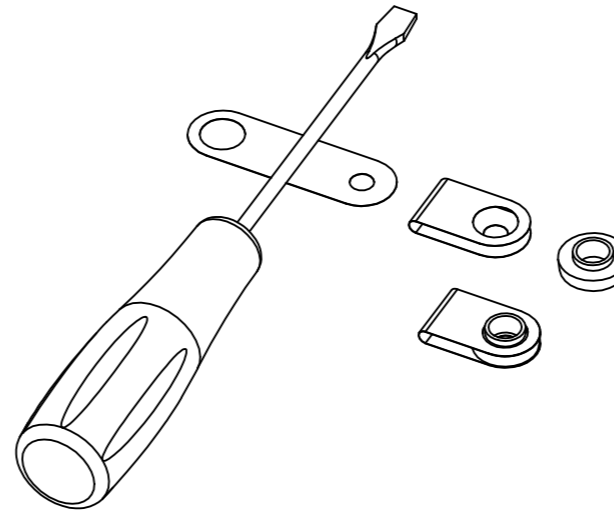

Note A  
M6X16

Note D  
Optional  
Grounding Foil.

Note B  
M6X20

Note C

If sleeve is not used,  
max. OD  $\phi$ 52mm Tube  
can be used

1 1/2" Tube (OD  $\phi$ 48.3mm)

Note A:  
Recommended torque: 8 Nm

Note B:  
Recommended torque: 8 Nm

Note C:  
Recommended torque: 30 Nm

Do not exceed recommended torque.

TT-3050A		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIME- TRES AND TOLERANCES ARE IN ACCORDANCE WITH DS/ISO 2768-1 F	DR. Ole Brix Larsen 15.11.2007		<b>Thrane &amp; Thrane</b> Telecommunications Engineering Copenhagen Denmark	
			CH. Jesper Sundberg 15.11.2007			
		ANGLES LIN. DIM.	AP. Ole Brix Larsen 15.11.2007		TITLE Assembly Instruction for Mast Mount Kit 403742A-920	
		MATERIAL	AP.			
NEXT ASSY USED ON		FIRST ANGLE PROJECTION		SIZE A3	CODEIDENT NO.	DRAWING NO TT97-126642
APPLICATION				SCALE	SHEET 1 OF 1	

4

3



2

1

D

D

C

C

B

B

A

A