

Reset to Factory Defaults

- For all Nera WorldPro users
- Resetting of the Nera WorldPro terminal
- Light reset
- Heavy reset

Table of Contents

1.	GENERAL	2
1.1	Light reset : " 123456 "	2
1.2	Heavy reset : " 9998".....	2
2.	HOW TO RESET USING NERA WORLDSET	2
3.	HOW TO RESET USING BGAN LAUNCHPAD	3
4.	FOR SUPPORT	3

1. GENERAL

Reset to Factory defaults is available via BGAN LaunchPad or Nera WorldSet,

1. Light Factory reset, for ports settings and terminal configuration
2. Heavy which erase every thing including GPS position. phonebook, sms etc.

1.1 Light reset : " 123456 "


By entering Security Code "123456" ... port configuration, QoS settings and terminal settings will be set to default values again. The configuration values will be set as for a new terminal.

1.2 Heavy reset : " 9998 "


By entering "9998" absolutely ALL data will be erased, GPS position, SMS, Phone Book, all Logs etc etc.... . This reset sets configuration values as for a new terminal, and erases all personal information and data logs.

2. HOW TO RESET USING NERA WORLDSET

1. From WorldSet Menu "6. Terminal Settings"
2. Scroll down to "7 Master Reset"
3. Press "Select"
4. The handset will ask for a Passkey for master reset. This is the same code as the Security Code in BGAN LaunchPad.
5. Enter the Passkey, press "Enter" and wait a moment.
6. Terminal will be switched off automatically.
7. Restart terminal.

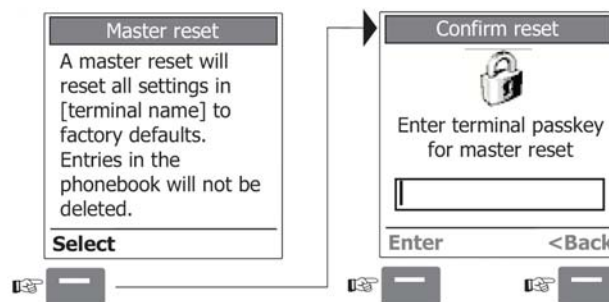

3. HOW TO RESET USING BGAN LAUNCHPAD

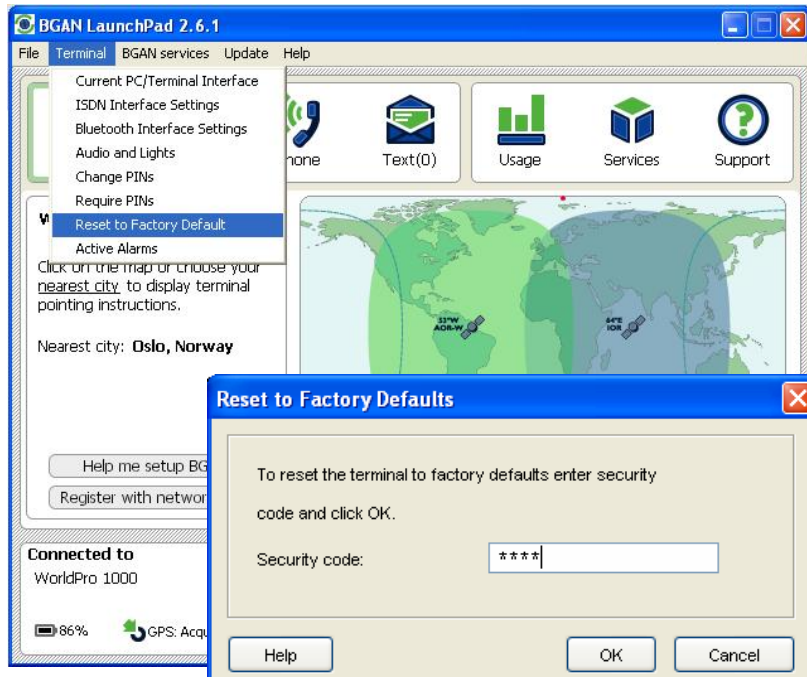

1. Select "terminal" and "Reset to Factory Default"
2. Enter the selected Security Code
3. Press OK , and wait a moment.
4. Terminal will be switched off automatically.
5. Restart terminal

4. FOR SUPPORT

Nera SatCom Marine & Mobile
 Service & support
 e-mail: mes_support@satcom.nera.no
 phone: +47 67244627 or +47 47606000
 fax: +47 67244621
 Web: <http://www.neraworld.com>