

# BR1 Mini M2M

Reliability in a small package

RS-232 / 485  
Serial Port



## Engineered toward Industrial Devices

Featuring an **RS-232/RS-485 serial port**, the BR1 Mini M2M is your best solution to bring connectivity to versatile industrial equipment and IoT devices.

IoT



Quality Sensor



Smart Meter




POS



Video Surveillance






Robotics

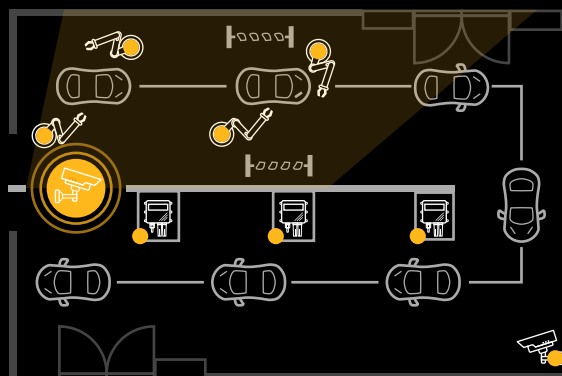


Our advanced **InTouch** technology allows for secure remote monitoring and management of your linked industrial device through a single cloud platform.




## Flexibility in Power and Ports

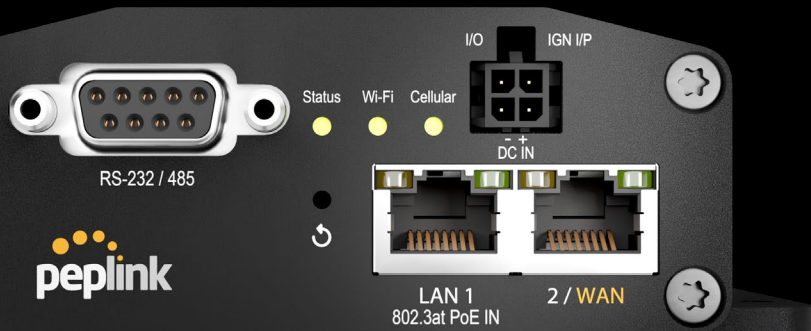

Power the device with **PoE**, **Micro-Fit** or our **4-pin to USB-C power cable**, allowing for flexible installations and portable deployments.




Don't limit yourself to a single device. The BR1 Mini M2M supports **dual serial port Y-cables** for even more efficiency.

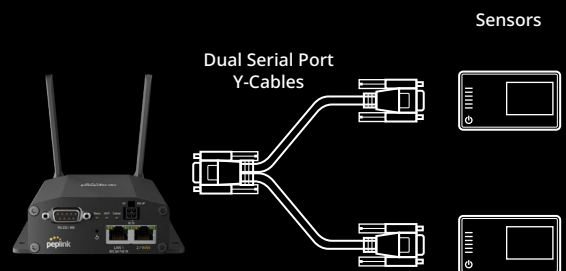

## Instant Connectivity

Gone are the days of agonizing over which cellular service to choose or needing to manage physical SIM cards. Experience instant cellular connectivity with a subscription to our **Peplink eSim data plans**. Leave the troubles to us while you concentrate on what truly matters.

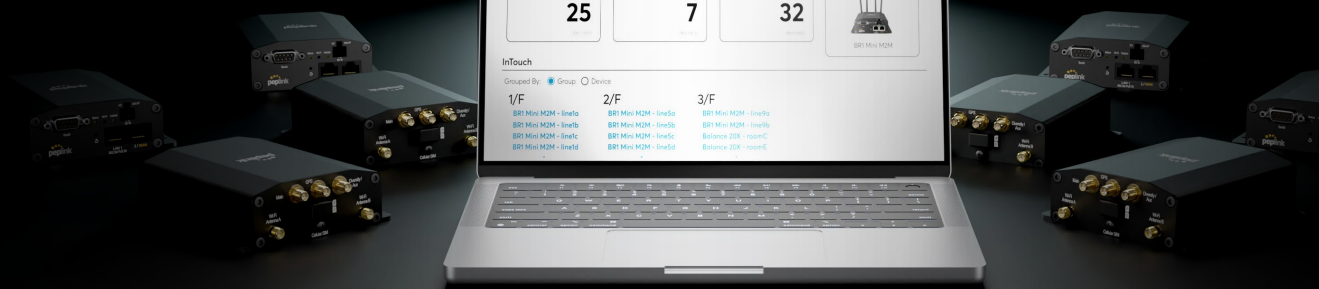




## Improved Dual-band Wi-Fi

Deploy more devices in the same location with no worry of network congestion. Have the option to collect data from your IoT machines from afar, helping admins save time and stay safe.




## Ruggedized and Reliable

The BR1 Mini M2M is built for maintaining a stable connection while withstanding tough environments, such as factories, power plants and outdoor



# BR1 Mini M2M

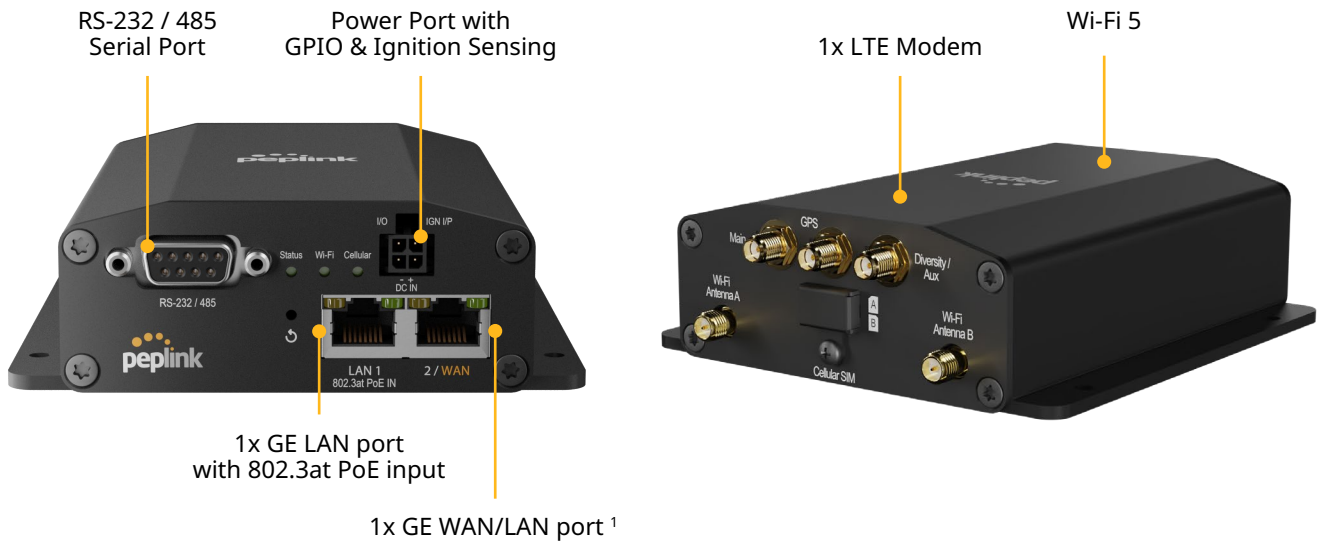

## Specifications

<b>WAN Interface</b>	1x 10/100/1000M Ethernet <sup>1</sup> 1x Embedded Cellular Modem with Redundant SIM Slots	<b>Antenna Connectors</b>	2x SMA Cellular Antenna Connectors 2x RP-SMA Wi-Fi Antenna Connectors 1x SMA GPS Antenna Connector
<b>LAN Interface</b>	1x 10/100/1000M Ethernet	<b>Power Input</b>	Power Port: 10V – 30V DC AC Adapter: AC Input 100V–240V / DC Output 12V Power over Ethernet 802.3at
<b>Wi-Fi Interface</b>	Simultaneous Dual-Band (2.4GHz / 5GHz) Wi-Fi 5, 2X2 MIMO Wi-Fi WAN <sup>1</sup> and/or AP	<b>Power Consumption</b>	13W (nominal), 18W (max.)
<b>SpeedFusion features</b>	Hot Failover <sup>1</sup> / Smoothing <sup>1</sup> Bandwidth Bonding <sup>1</sup>	<b>Dimension</b>	5.1 x 4.2 x 1.4 inches / 129.5 x 107 x 35 mm
<b>Number of SpeedFusion Peers</b>	2 / 5 <sup>1</sup>	<b>Weight</b>	1 pound / 455 grams
<b>Feature</b>	GPIO, Ignition Sensing, Serial communication (RS-232 / 485)	<b>Operating Temperature</b>	-40° – 149°F / -40° – 65°C
<b>Router Throughput</b>	300Mbps	<b>Humidity</b>	15% – 95% (non-condensing)
<b>SpeedFusion VPN Throughput</b>		<b>Certifications</b>	FCC, IC C1D2 UL+CUL (60950-1 / 62368-1)
- No Encryption	80Mbps	<b>Package Content</b>	1x BR1 Mini M2M 2x LTE Antennas (ACW-235) 2x Dual Band Wi-Fi Antennas (ACW-342) 1x GPS Active Antenna (ACW-232) 1x 12V 2A 4pin Power Supply (ACW-632)
- 256-bit AES	60Mbps	<b>SIM Options</b>	Nano-SIM (4FF) Peplink eSIM <sup>3</sup> BYO eSIM (2 profiles) <sup>3</sup>
<b>Recommended Users</b>	1-60	<b>Warranty</b>	1-Year Limited Warranty
<b>Cellular Data Rate <sup>2</sup> (Downlink/Uplink)</b>	CAT-4: 150 Mbps / 50 Mbps		

<sup>1</sup> Require a PrimeCare subscription or a feature pack add-on license (MAX-BR1-MINI-LC-FP).

<sup>2</sup> Maximum theoretical data rate.

<sup>3</sup> Models with selected SKU support eSIM. Details can be found [here](#).

Specifications are subject to change without notice.

## Ordering Information

Product Code	Regions <sup>^</sup>	LTE Bands	3G Bands
MAX-BR1-MINI-M2M-LTE-US-T-PRM Embedded Modem(s): 1x CAT-4	North America*  *US Carrier Certifications: AT&T, T-Mobile, Verizon, FirstNet	B2, B4, B5, B12, B13, B14, B66, B71	WCDMA/HSPA+/DC-HSPA+: B2, B5
MAX-BR1-MINI-M2M-LTE-E-T-PRM Embedded Modem(s): 1x CAT-4	APAC/EMEA	B1, B3, B5, B7, B8, B20, B38, B40, B41	WCDMA/HSPA+/DC-HSPA+: B1, B5, B8
MAX-BR1-MINI-M2M-LTE-MX-T-PRM Embedded Modem(s): 1x CAT-4	APAC, Latin America, Malaysia, Indonesia	B1, B2, B3, B4, B5, B7, B8, B28, B40	WCDMA/HSPA+/DC-HSPA+: B1, B2, B5, B8

<sup>^</sup> Regions are for reference only. For specific location compatibility, please refer to the bands.

## Featured Add-on

Product Code	Description
PRM-A-1Y / PCP-A-1Y	PrimeCare A / PrimeCare+ A (1-Year)
PRM-A-2Y / PCP-A-2Y	PrimeCare A / PrimeCare+ A (2-Year)
PRM-A-4Y / PCP-A-4Y	PrimeCare A / PrimeCare+ A (4-Year)
MAX-BR1-MINI-LC-FP	Feature pack for BR1 Mini enables Ethernet WAN, Wi-Fi WAN, Hot Failover, Smoothing and Bandwidth Bonding
ANT-MB-22G-S-B-6	Mobility 22G - 2x2 MIMO Cellular and Wi-Fi Antenna System with GPS (Black)
ANT-MB-22G-S-W-6	Mobility 22G - 2x2 MIMO Cellular and Wi-Fi Antenna System with GPS (White)
ANT-SLM-22G-S-B-6	Slim 22G - 2x2 MIMO Cellular and Wi-Fi Antenna System with GPS (Black)
ACW-634	10ft/3m DC Power Cable
ACW-643	Vehicle Cigarette to Molex Power Cable
ACW-790	Dual Serial Y-Cable
ACW-791	Peplink 4-Pin Microfit to USB-C Power Cable
ACW-DIN-BR1-MINI	DIN Rail mount kit

## Deep Dive

<b>Software</b>	Pepwave MAX Firmware	<b>Advanced QoS</b>	Individual Bandwidth Limit Application Prioritization <ul style="list-style-type: none"><li>• SIP, HTTPS, VPN QoS</li><li>• Custom Application QoS</li></ul>
<b>WAN</b>	Support for PPPoE, Static IP, DHCP WAN Link Health Check Bandwidth Allowance Monitor Support for Dynamic DNS services WAN Port Convertible into LAN Port	<b>Networking</b>	NAT and IP Forwarding Static Routes Port Forwarding Many to One, One to One NAT NAT Pool SIP ALG, H.323 ALG UPnP, NAT-PMP
<b>LAN</b>	DHCP Server for LAN Clients Extended DHCP Option DHCP Reservation DNS Proxy for LAN Clients VLAN on LAN Support	<b>Captive Portal</b>	Support for Wired and Wireless LAN clients Support RADIUS Authentication Time and Usage Quotas on Open Access Mode Built-in Customizable Splash Page
<b>Security</b>	Stateful Firewall DoS Prevention Web Blocking	<b>Device Management</b>	Web Administrative Interface Command Line Interface InControl Cloud Management Email Notification Active Client & Session Lists Bandwidth Usage Statistics Syslog Service SNMP v1, v2c and v3
<b>Complete VPN Solution</b>	SpeedFusion VPN/SpeedFusion ... Hot Failover ... Site-to-Site VPN ... 256-bit AES Encryption ... Pre-shared Key Authentication ... IPsec VPN (Network-to-Network) <sup>^</sup>		

<sup>^</sup> IPsec VPN supports connection with Cisco, Juniper, Peplink, or Pepwave devices